

2'x 4' Panel

30W, 40W, 50W Selectable | 3CCT | 120-347V

High performance, light-weight luminaires suitable for lay-in, surface or suspension mounting.
Ideal for use in schools, health care applications, offices, retail spaces, and more

Less than 1.8" Deep
ideal for tight plenum areas

0-10V Dimming Lead on Both
Sides of Driver Junction Box



Non-yellowing
Frosted Lens

120-347V, 0-10V
Dimmable Driver

Power Selectable
(30W / 40W / 50W)


Colour Selectable
(3500K / 4000K / 5000K)

Waffle Stamping
increases heat dissipation
and driver life

Use Switches to
Select Power & Colour

Seismic Clips
Included

Junction Box (PLS-JB)
sold separately

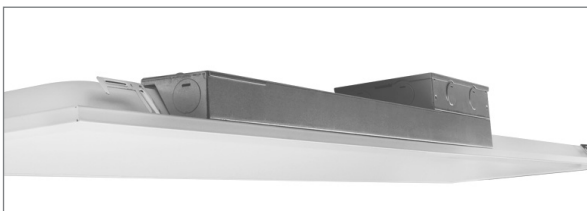

Accessories (Sold Separately)



Suspension Kit
PLS-SUSKIT



Surface Mount Kit
PLS24-SK



Junction Box
PLS-JB



Recessed Frame Kit
PLS24-RFK

TECHNICAL DATA



LIGHT SPECIFICATIONS


Efficacy	110 lm/W
CCT	3500K/4000K/5000K
CRI	82
Dimmable	0-10V
Beam Angle	120°
L70 Life	>54,000 hrs
Warranty	7-year
Factory Settings	50W 4000K

LUMEN OUTPUT			
	3500K	4000K	5000K
30W	3830 lm	3966 lm	3819 lm
40W	4884 lm	5133 lm	4900 lm
50W	5308 lm	5656 lm	5355 lm

APPROVALS AND LISTINGS

ETL	5000444
DLC	S-STR40A

DIMENSIONAL DRAWINGS (IN)

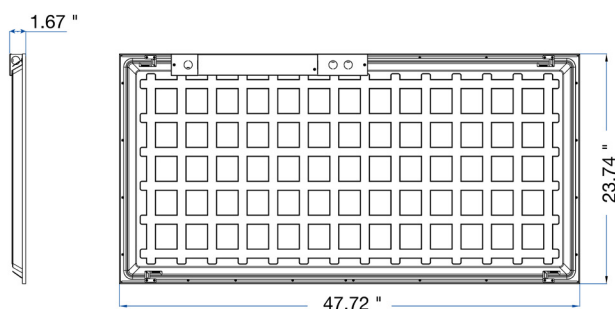

ELECTRICAL

Wattage	Selectable (30W/40W/50W)
Voltage	120-347V
Power Factor	>0.9
Current	0.55A
THD	25%
Operating Temp	-20 to 40°C

CONSTRUCTION

Housing	Metal
Finish	Polyester Powder Coat
Finish Colour	White
IP Rating	IP20

DIMENSIONS & WEIGHTS

Fixture Weight	8.5 lbs
Fixture Dimensions	23.75" x 1.67" x 47.72"
Carton Qty	4 pcs
Carton Weight	32.6 lbs
Carton Dimensions	48.7" x 7" x 25"

ACCESSORIES (SOLD SEPARATELY)

PLS24-SK	Surface Mount Kit
PLS24-RFK	Recessed Frame Kit
PLS-SUSKIT	Suspension Kit
PLS-JB	Junction Box